



Jacks, Couplers & Winches

We make it a point to have a wide selection of top quality trailer parts available to our customers. Regardless of the type of trailer you build or repair, we have something to fit your needs.

Straight Tongue Couplers.....	F-2-F-3	Power Jacks.....	F-14
A-Frame Couplers.....	F-3 & F-4	Magnum Lift Bolt-On Electric Motor.....	F-14
Coupler & Jack Combos.....	F-4	Bulldog Bolt-On Electric Motor.....	F-15
3" Adjustable Pintle Eye.....	F-4	Leveling Scissor Jack.....	F-15
Heavy Duty Adjustable Clevis, Coupler & Brackets.....	F-4	Atwood Stabilizer Jack.....	F-15
3/4" Adjustable Clevis.....	F-4	Wheel Chock.....	F-15
Adjustable Tongue Couplers.....	F-4 & F-5	Big Foot Hydraulic Jack.....	F-16
Packaged Coupler Latch Repair Kits.....	F-6	Atwood Duraleg Jack.....	F-16
Gooseneck Coupler Head.....	F-6	Blaylock EZ Jack.....	F-16
Gooseneck Couplers.....	F-6-F-7	Dropleg Jacks.....	F-17-F19
King Pin Gooseneck Coupler.....	F-8	Heavy Duty Jacks.....	F-19
Flat Mount Couplers.....	F-8	RV Landing Gear.....	F-20
Square Mount Draw Bars & Nose Plates.....	F-8	A-Frame Jack Support Plates & Flanges.....	F-21
Tow Ring Draw Bars.....	F-9	Jack Feet & Casters.....	F-21
Flat Draw Bars.....	F-9	Swivel Jack Mounting Brackets.....	F-21
A-Frame Jacks.....	F-9, F-10	Redline Jack Repair Parts.....	F-22
Pipe Mount Swivel Jacks.....	F-10, F-11	SAF-Holland Jack Repair Parts.....	F-22
Snap Ring Swivel Jacks.....	F-11, F-12	Bulldog Jack/Coupler.....	F-22
Bolt-Thru Swivel Jack.....	F-12, F-13	Shelby Winches.....	F-23
Boxed Swivel Jacks.....	F-13	Fulton Single Speed Winches.....	F-23
Kickstand Jack.....	F-13	Winch Straps.....	F-23
Rack Posts and Gearboxes.....	F-13	Ramsey Electric Winches.....	F-24



Straight Tongue Couplers

Atwood's 2" ball couplers feature a patented high strength wrap-around yoke with a sliding clamp for secure coupling. Part #80131 features a self-adjusting ball clamp which automatically adjusts to slight variations in ball size.



PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
80050	268000	2"	3" SQUARE	PAINTED	3,500 LBS
80060	268100	2"	3" SQUARE	PAINTED	5,000 LBS
80081	268400	2"	2" SQUARE	PAINTED	5,000 LBS
80131	268800	2 5/16"	3" SQUARE	PAINTED	8,500 LBS



BULLDOG® drop-forged couplers offer spring-loaded collars which provide positive-action coupling, ensuring a snug fit onto the hitch ball.

PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
2B2	279400	2"	2 1/4" O.D. ROUND SHANK	PAINTED	5,000 LBS
2B4	279600	2"	3" SQUARE	PAINTED	5,000 LBS
2B5	279800	2"	3 1/2" ROUND	PAINTED	5,000 LBS
3B4	280100	2"	3" SQUARE	PAINTED	7,000 LBS
4B2	280200	2 5/16"	2 1/4" O.D. ROUND SHANK	PAINTED	12,500 LBS
4B4	280400	2 5/16"	3" SQUARE	PAINTED	12,500 LBS



CP01-070

Zinc plated straight tongue couplers are ideal for marine, utility and cargo applications. Redline couplers are labeled, making them ideal for retail display.

PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
CP01-010	264002	1 7/8"	2" SQUARE	ZINC PLATED W/LABEL	2,000 LBS
CP01-020	264004	1 7/8"	2 1/2" SQUARE	ZINC PLATED W/LABEL	2,000 LBS
CP01-030	264006	1 7/8"	3" SQUARE	ZINC PLATED W/LABEL	2,000 LBS
CP01-040	264010	2"	2" SQUARE	ZINC PLATED W/LABEL	3,500 LBS
CP01-050	264012	2"	2 1/2" SQUARE	ZINC PLATED W/LABEL	3,500 LBS
CP01-060	264014	2"	3" SQUARE	ZINC PLATED W/LABEL	3,500 LBS
CP01-070	264020	2"	3" SQUARE	ZINC PLATED W/LABEL	5,000 LBS



Shelby's "Posi-Lock" trigger action mechanism clamps and releases the ball for fast, easy and secure hookups.

PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
5143	262700	1 7/8"	2" SQUARE	OILY	2,000 LBS
5141	262710	1 7/8"	2 1/2" SQUARE	OILY	2,000 LBS
5144	262720	1 7/8"	3" SQUARE	OILY	2,000 LBS
5145	262730	2"	2" SQUARE	OILY	3,500 LBS
5142	262740	2"	2 1/2" SQUARE	OILY	3,500 LBS
5146	262750	2"	3" SQUARE	OILY	3,500 LBS
5175	262775	2"	3" SQUARE	OILY	5,000 LBS



11200

The Fas-Lok® latching mechanism on these Fulton® brand couplers permit quick and easy trailer hook-up, and is factory adjusted for end-user convenience. A coupler lock hole is provided for additional trailer security. Ball clamp assemblies are serviceable for in-field replacement.

PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
11200	265505	1 7/8"	2" Square	Oily	2,000 lbs
22200	265515	2"	2" Square	Oily	3,500 lbs
22250	265517	2"	2 1/2" Square	Oily	3,500 lbs
22300	265519	2"	3" Square	Oily	3,500 lbs

For Coupler Security Locks and Brackets See Page K-13 & K-16



“Yard Dog” Straight Tongue Coupler

As tough as it's name, the “Yard Dog” coupler design has been popular in the rental industry for many years. This weldable coupler is made of 1030 cast steel.

PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
WFH3	267300	1 7/8" & 2"	2" SQUARE	PAINTED	7,500 LBS
WFH3RK	267345	LATCH REPAIR KIT FOR WFH3			



A-Frame Couplers

Atwood's A-Frame Couplers are available with their patented wrap-around yoke style (A), a thumb latch style (B), or with a trigger style (C) locking mechanism. The #82680 undermount coupler, which has a thumb latch style locking mechanism, is widely used in the mobile home industry.



PART NO.	REF. NO.	BALL	STYLE	TONGUE SIZE	FINISH	CAPACITY
80071	268200	2"	A	50° A-FRAME	PAINTED	5,000 LBS
88555	268250	2"	C	50° A-FRAME	PAINTED	8,000 LBS
80101	268600	2 5/16"	A	50° A-FRAME	PAINTED	8,500 LBS
81911	269000	2 5/16"	B	50° A-FRAME	PAINTED	10,000 LBS
82680	269200	2 5/16"	D	50° A-FRAME	PAINTED	13,000 LBS
UNDERMOUNT						
64-4102	269100	2 5/16"	C	50° A-FRAME	PAINTED	10,000 LBS
88050	267840	2" LATCH REPAIR KIT FOR FRANKLIN 64-4103/ATWOOD MARVEL 88000				
88061	267853	2 5/16" LATCH REPAIR KIT FOR FRANKLIN 64-4102/ATWOOD MARVEL 88007				

80071
Style A



81911
Style B



88555
Style C



82680
Style D



See Page F-6 for additional latch repair kits.

BULLDOG® drop-forged couplers offer spring-loaded locking collars which provide positive-action coupling, ensuring a snug fit onto the hitch ball. Tongue size is 50° A-Frame.

PART NO.	REF. NO.	BALL	LATCH	FINISH	CAPACITY
2B8	280000	2"	LOW-PROFILE	PAINTED	5,000 LBS
3B8	280120	2"	LOW-PROFILE	PAINTED	7,000 LBS
4B8L	280590	2 5/16"	LOW-PROFILE	PAINTED	12,500 LBS
4B8	280600	2 5/16"	HI-PROFILE	PAINTED	12,500 LBS



4B8L

Shelby's “Posi-Lock” trigger action mechanism clamps and releases the ball for fast, easy and secure hookups.

PART NO.	REF. NO.	BALL	TONGUE SIZE	FINISH	CAPACITY
5172	262800	2"	50° A-FRAME	OILY	5,000 LBS
5113	262808	2 5/16"	50° A-FRAME	PAINTED	13K



5172



Fulton® A-Frame stamped couplers have high strength steel housings and are designed to weld onto frame members set at 50-degree angles. Part number 44150W is a cast steel coupler with the Wedge-Latch™ design, and has a cast shield to prevent latch damage.

PART NO.	REF. NO.	BALL SIZE	FINISH	CAPACITY
33305-P	266680	2"	Prime	5,000 lbs
44305R-P	266692	2 5/16"	Prime	10,000 lbs
44150W	266700	2 5/16"	Prime Cast	15,000 lbs

44305R-P



33305-P



For Coupler Security Locks and Brackets See Page K-13 & K-16



Coupler & Jack Combinations



The 140070 jack foot is perfect for your 2" and 2 1/4" round tube jacks. This jack foot comes complete with a 1/4" snapper pin to secure the foot to the jack tube. The gloss black finish ensures a good looking product that is protected from the elements.



For your convenience, we now offer 2 jack and coupler packages. These 2 packages offer quality product at affordable prices. The 2CJF-COMBO comes with a 2" A-frame coupler, 2K LB A-frame jack and a 2K lb jack foot. The 2CJ-COMBO comes with the 2" A-frame coupler and 2K LB. A-frame jack.

PART NO.	REF. NO.	DESCRIPTION
2CJF-COMBO	266682	2" A-FRAME COUPLER, 2K JACK COMBO W/JACK FOOT
2CJ-COMBO	266683	2" A-FRAME COUPLER, 2K JACK COMBO



3" Adjustable Pintle Eye



18128

Expect a long service life from this high quality forged pintle eye. Inside diameter of the ring is 3" and ring thickness is 1 5/8".

PART NO.	REF. NO.	DESCRIPTION	CAPACITY
18128	305600	EYE, W/4-HOLE BRACKET & BOLTS	12,000 LBS
18128XL	305650	EYE, W/6-HOLE BRACKET & BOLTS	12,000 LBS
16137	305810	EYE ONLY FOR 18128, 18128XL	20,000 LBS



Heavy Duty Adjustable Clevis, Coupler & Brackets

AC20XL8

CL20XL8



The 20K Wallace Forge clevis and coupler offer a 3-hole base for additional strength. This allows for a 20K rating when used with the C20-8 channel. The clevis and coupler are also available with the channel and hardware.

PART NO.	REF. NO.	DESCRIPTION	CAPACITY
AC20XL8	305671	ADJ 2-5/16" CAST CPLR 20K W/BOLTS/8-HOLE BKT	
CL20XL8	305755	ADJ 1" CLEVIS 20K W/BOLTS/8-HOLE BKT	
CL20	305816	ADJ 1" CLEVIS 20K 3-HOLE MOUNT	
AC20	305829	ADJ CPLR 2-5/16" CAST 20K 3-HOLE MOUNT	
C20-8	306040	CHANNEL BKT 8-HOLE FOR ADJ CPLRS	



3/4" Adjustable Clevis



9095

This forged clevis provides more strength than a cast equivalent. The black powder coat finish also resists rust and corrosion. Takes a 3/4" diameter hitch pin, such as 34H on page K-8.

PART NO.	REF. NO.	DESCRIPTION	CAPACITY
9095	305700	CLEVIS, W/4-HOLE BRACKET & BOLTS	12,000 LBS
9095XL	305750	CLEVIS, W/6-HOLE BRACKET & BOLTS	12,000 LBS
8979	305815	CLEVIS ONLY FOR 9095, 9095XL	12,000 LBS



1 7/8" & 2" Adjustable Tongue Couplers



WFH3LA

Keep Your Equipment Safe – Protect It With A “Yard Dog”!

As tough as it's name, the “Yard Dog” Coupler design has been popular in the Rental Industry for many years. The forged coupler housing is virtually indestructible.



WFAH3-A

PART NO.	REF. NO.	DESCRIPTION	CAPACITY
WFAH3	267305	COUPLER ONLY, NO BOLTS	7,500 LBS
WFAH3-A	267310	COUPLER ASSEMBLY, W/4-HOLE BRACKET & BOLTS	7,500 LBS
WFAH3-AXL	267315	COUPLER ASSEMBLY W/6-HOLE BRACKET & BOLTS	7,500 LBS
WFH3LA	267335	RING TO BALL COUPLER ADAPTER, FITS 2 1/2" & 3" I.D. PINTLE EYE	3,500 LBS
WFH3RK	267345	LATCH REPAIR KIT FOR WFH3, WFAH3	

For Coupler Security Locks and Brackets See Page K-13 & K-16

2" Adjustable Tongue Couplers

The BULLDOG® brand features the only automatic and continuously tight ball fit in the industry. An adjustable coupler assures level operation for trailers when pulled by a variety of different vehicles.



PART NO.	REF. NO.	DESCRIPTION	CAPACITY
3B6M	305824	BULLDOG® COUPLER W/BOLTS FOR 1040, 1040XL	7,000 LBS
1040	305806	BULLDOG® COUPLER W/4-HOLE BRACKET & BOLTS	7,000 LBS
1040XL	305807	BULLDOG® COUPLER W/6-HOLE BRACKET & BOLTS	7,000 LBS



3B6M

2 5/16" Adjustable Tongue Couplers

These couplers permit adjustment of the hitch height of the trailer, which allows the trailer to be towed by different vehicles. Atwood is equipped with Grade 8 bolts, while Bulldog, Wallace Forge and Fulton use Grade 5 bolts. Always follow manufacturer's recommendations for torque requirements.

PART NO.	REF. NO.	MANUFACTURER	BRACKET	BOLTS /NUTS	CAPACITY
2425160	305819	WALLACE FORGE	NONE	YES	14,000 LBS
A256C	305660	FULTON	4 HOLE	YES	14,000 LBS
A256CXL	305665	FULTON	6 HOLE	YES	14,000 LBS
A256	305828	FULTON	NONE	YES	14,000 LBS
81906	305821	ATWOOD	NONE	YES	15,000 LBS
81906C	305801	ATWOOD	4 HOLE	YES	14,000 LBS
81906CXL	305804	ATWOOD	6 HOLE	YES	14,000 LBS
4B6M	305826	BULLDOG	NONE	YES	12,500 LBS
1051	305808	BULLDOG	4 HOLE	YES	12,500 LBS
1051XL	305809	BULLDOG	6 HOLE	YES	12,500 LBS
WFAH4	267320	WALLACE FORGE "YARD DOG"	NONE	NO	12,000 LBS
WFAH4-A	267325	WALLACE FORGE "YARD DOG"	4 HOLE	YES	12,000 LBS
WFAH4-AXL	267330	WALLACE FORGE "YARD DOG"	6 HOLE	YES	12,000 LBS



81906

JACKS,
COUPLERS
& WINCHES



WFAH4-A



2425160



4B6M



A256



Replacement Parts		
PART NO.	REF. NO.	DESCRIPTION
9093	305830	GRADE 5 MTG BOLT 5/8" X 4 1/2" FOR WALLACE FORGE & BULLDOG
6-38	078800	5/8" LOCKNUT FOR WALLACE FORGE & BULLDOG
8978	306000	4-HOLE CHANNEL BRACKET FOR ALL, 14K
8978XL	306025	6-HOLE CHANNEL BRACKET FOR ALL, 14K
80399	305835	MTG BOLT 5/8" X 4 1/2" GRADE 8 FOR ATWOOD
58LW	305840	5/8" LOCKWASHER FOR ATWOOD
58LN-GR5	305845	5/8" - 11 HEX LOCKNUT, GR5 FOR ATWOOD

Redline Packaged Coupler Latch Repair Kits



Trailer towing with a worn or broken coupler is dangerous. Worn or broken couplers should be replaced or repaired. Redline Kits are packaged for showroom display.

PART NO.	REF. NO.	MANUFACTURER	COUPLER STYLE	BALL
CP02-010	264050	ATWOOD	YOKE STYLE	2"
CP02-020	264055	ATWOOD	8031, 80281	2 5/16"
CP02-030	264060	ATWOOD	TRIGGER STYLE A-FRAME	2"
CP02-040	264070	SHELBY	POSI-LOCK, CLASS 1	1 7/8"
CP02-050	264075	SHELBY	POSI-LOCK, CLASS 2	2"
CP02-060	264080	SHELBY	POSI-LOCK, CLASS 3	2"
CP02-090	264100	FULTON	HANDWHEEL (308)	2"
CP02-110	264120	BULLDOG	HI-PROFILE HANDLE	ALL
CP02-120	264125	BULLDOG	PIN & RETAINER	ALL

Gooseneck Coupler Head



K1

Can be mounted on the trailer as a standard gooseneck coupler or in the truck bed. Removable steel pin secures hitch ball in the cast housing. Meets rated capacity only when used with the pin supplied.

PART NO.	REF. NO.	BALL	DESCRIPTION	CAPACITY
K1	291300	2 5/16"	COUPLER HEAD W/ 1/2" LOCK PIN	30,000 LBS
WF2	291902	3"	GN COUPLER HEAD WITH 34SL PIN	40,000 LBS
12SL	293920		REPLACEMENT LOCK PIN FOR K1 COUPLER	
34SL	293925		REPLACEMENT LOCK PIN FOR WF2 COUPLER	

JACKS,
COUPLERS
& WINCHES

Gooseneck Couplers



SAC2516-I



ST2516NP

These couplers feature a cast cone shaped bottom plate and a heavy-duty cast handle. Replacement screws and nuts are also available.

PART NO.	REF. NO.	BALL	TUBE O.D.	OVERALL HEIGHT	EXTENDED HEIGHT	CAPACITY
ST2516NP	291200	2 5/16"				20,000 LBS
SAC2516-I	293015	2 5/16"	4 1/2" ROUND	28"	38"	24,000 LBS
SAC-BOLT	293900					REPL 3/4" - 10 X 3" SET SCREW FOR #SAC2516
SAC-NUT	293910					REPL 3/4" NUT FOR #SAC2516

FULTON

The Fulton cast steel gooseneck coupler head is designed for easy welding to 3" or 4" diameter tubing. Quick and easy latching action eliminates the need to be in the tow vehicle for hook-up.

GN24



PART NO.	REF. NO.	BALL	TUBE O.D.	CAPACITY
GN24	291500	2 5/16"	COUPLER HEAD ONLY	24,000 LBS

Gooseneck Couplers (continued)

T.E.M.'s "AutoLock" design works on the same principle as a 5th wheel. The jaws of the coupler open and unhook from the hitch ball without having to raise or lower the coupler.



SM2516NP



SM251628 LL2516ST

AUTOLOCK						
PART NO.	REF. NO.	BALL	TUBE O.D.	OVERALL HEIGHT	EXTENDED HEIGHT	CAPACITY
SM2516NP	291400	2 5/16"	COUPLER ONLY NO PIPE			24,000 LBS
SM251628	292400	2 5/16"	4" ROUND	28"	NON-ADJUSTABLE	24,000 LBS
LL2516ST	293400	2 5/16"	4" SQUARE	28"	38"	24,000 LBS

BULLDOG[®] gooseneck couplers are quick and easy to engage, and are strong and secure on the road. The unique, patented, extruded locking plate design and higher strength steel components make BULLDOG[®] gooseneck couplers 65% stronger than similar products.



JACKS, COUPLERS & WINCHES



HBA2516



HBQ2516ADJ



HBQ2516TW



HBA2516-25K



HBA2516-30K

NOTE: Bulldog Gooseneck Couplers are in compliance w/SAE standard J2638.

PART NO.	REF. NO.	BALL	TUBE O.D.	OVERALL HEIGHT	EXTENDED HEIGHT	CAPACITY
HB2516NP	291250	2 5/16"	COUPLER ONLY, NO PIPE			20,000 LBS
HBA2516	293050	2 5/16"	4 1/2" ROUND	29 1/2"	37 1/2"	20,000 LBS
HBQ2516ADJ	293150	2 5/16"	4 1/2" SQUARE	32"	40"	25,000 LBS
HBQ2516TW	293158	2 5/16"	4 1/2" SQUARE	32"	39"	30,000 LBS
HBA2516-25K	293052	2 5/16"	4 1/2" ROUND	29 1/2"	37 1/2"	25,000 LBS
HBA2516-30K	293054	2 5/16"	4 1/2" ROUND	29 1/2"	37 1/2"	30,000 LBS



King Pin Gooseneck Coupler

Most gooseneck trailers are designed to be towed on a gooseneck hitch ball located in the bed of the tow vehicle. However, this king pin and pipe assembly is designed for those wanting to tow a gooseneck trailer with a 5th wheel hitch. **The king pin is specially designed with zero bolster.** The 4" O.D. round tube will fit as an inner pipe on most standard gooseneck outer tubes. Always follow manufacturer's torque specs when tightening set screws.

PART NO.	REF. NO.	PIPE	DESCRIPTION	CAPACITY
2085205	293799	22"	4" O.D. ROUND TUBE, 22" LONG, LESS OUTER TUBE	30,000 LBS

Flat Mount Couplers

A flat mount coupler is an excellent alternative to tow rings or pintle hooks. These standard ball couplers work with 2 5/16" hitch balls. Mounts to most trailer nose plates.



PART NO.	REF. NO.	BALL	FINISH	CAPACITY
75074	269350	2 5/16"	PAINTED	25,000 LBS
FMC251614	305817	2 5/16"	PAINTED	14,000 LBS
FC25	305818	2 5/16"	PAINTED	25,000 LBS



75074



FMC251614



FC25



Square Mount Draw Bars and Nose Plates



Commonly used on equipment and over-the-road trailers, the flat back design of the following Draw Bars allows easy mounting on the nose plate. The bolt kits are approved for use with the respective draw bars/nose plates.

1250-15



SQUARE MOUNT DRAW BARS						
PART NO.	REF. NO.	TYPE	EYE DIAMETER	GTW LBS	BOLT PATTERN	
1250-15	308400	SAF-HOLLAND	2 1/2"	40,000	4 BOLT, 6" SQUARE	
R49A	308401	WALLACE	2 1/2"	42,000	4 BOLT, 6" SQUARE	
1385	308600	SAF-HOLLAND	3"	60,000	4 BOLT, 6" SQUARE	
R51A	308601	WALLACE	3"	66,000	4 BOLT, 6" SQUARE	



TNP71675



NOSE PLATES			
PART NO.	REF. NO.	DESCRIPTION	FOR USE WITH:
TNP71675	308410	8 HOLE, 3/4" X 7" X 16"	R49A & 1250-15
TNP716100	308610	8 HOLE, 1" X 7" X 16"	R51A & 1385
BLT71675	308412	4 BOLTS, 4 NUTS, 4 WASHERS	TNP71675
BLT716100	308612	4 BOLTS, 4 NUTS, 4 WASHERS	TNP716100

Tow Ring Draw Bars

Primarily used on equipment and utility trailers, the single point mounting design eliminates the need for a swivel type pintle hook in demanding off-road situations.



PART NO.	REF. NO.	TYPE	EYE DIAMETER	GTW LBS	SHANK DIMENSION
1250-3	307800	SAF-HOLLAND	2 1/2"	15,000	1 1/2" O.D. X 3 1/4" L
050A	307801	WALLACE	2 1/2"	20,000	1 1/2" O.D. X 3 1/4" L
1249-2H	308000	SAF-HOLLAND	3"	45,000	2" O.D. X 4 1/2" L
051B	308001	WALLACE	3"	50,000	2" O.D. X 3 3/4" L

Flat Draw Bars

The Flat Bar design allows the following Draw Bars to easily bolt to the trailer tongue (#LW10 welds to trailer tongue). For all types of trailer applications.



JACKS,
COUPLERS
& WINCHES

PART NO.	REF. NO.	TYPE	EYE DIAMETER	GTW LBS	SHANK DIMENSION
LW10	308300	WALLACE	2 1/2"	10,000	2 1/2" WIDE, 2" LONG
1228-1	308800	SAF-HOLLAND	2 7/16"	20,000	7 BOLT, 3" X 14 1/4"
043D	308801	WALLACE	2 1/2"	20,000	7 BOLT, 3" X 14 1/4"
1238	309000	SAF-HOLLAND	3"	22,000	7 BOLT, 3" X 13 5/8"
052D	309001	WALLACE	3"	22,000	7 BOLT, 3" X 14 5/8"



Atwood A-Frame Jacks

For mounting on A-Frame Couplers, the following Atwood jacks come with or without a mounting bracket, for bolt-on or weld-on applications. See page F-21 for Atwood casters and feet.



PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	WIND
40201	273300	2,000 LBS	15"	7.75"	21"	TOP
87510	273400	2,000 LBS	14"	7.75"	24.25"	SIDE
80380	273600	5,000 LBS	14"	NO BRACKET	21.75"	TOP
80391	273800	5,000 LBS	14"	11.25"	22"	TOP



A-Frame Jacks



For mounting on A-Frame Couplers, the following jacks come with a mounting bracket for bolt-on or weld-on applications. The #155033CW comes with a removable steel wheel.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND
EA2000	267252	2,000 LBS	14"	8"	22.5"	TOP
140060	267254	5,000 LBS	14"	10.8"	26"	TOP
RV2000	267256	2,000 LBS	14"	8"	22"	SIDE
155022	282625	2,000 LBS	15"	8.5"	24.25"	TOP
155033	282630	2,000 LBS	15"	5.5"	23.25"	TOP
155033CW	282635	1,000 LBS	15"	12.50"	30.50"	TOP
155100	282700	2,000 LBS	15"	7.5"	28.25"	TOP
175020	284800	5,000 LBS	15"	10.7"	21.5"	TOP

Shelby A-Frame Jacks



For mounting on A-Frame Couplers, these Shelby jacks come with a mounting bracket for bolt-on or weld-on applications. The outer tube is painted black, and the inner tube is zinc plated. See part #5702 caster and #5703 foot on page F-19.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND
5718	263101	2,000 LBS	14"	8.25"	19"	TOP
5719	263104	5,000 LBS	14"	10.24"	19"	TOP

Atwood Pipe Mount Swivel Jacks



For industrial and agricultural applications. Atwood Pipe Mount Swivel Jacks are engineered for the most demanding situations, giving superior side-load stability over snap ring jacks. The inner Weld-on Pipe Swivel Bracket that attaches to the trailer is sold separately on page F-19.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND
80459	271000	2,000 LBS	10"	10.4"	14.2"	TOP
82332	271200	2,000 LBS	10"	10.7"	15.5"	SIDE
40006	271500	2,000 LBS	15"	14.5"	18.57"	TOP
82471	271600	5,000 LBS	15"	10.6"	25.1"	TOP

Shelby Pipe Mount Swivel Jacks



Shelby's Square Tube Pipe Mount Swivel Jacks are plated with an alkaline-based Zinc. Includes the inner weld-on pipe swivel bracket.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	MOUNT STYLE
6101GS	263120	3,500 LBS	15"	15.5"	24.25"	SIDE	ROUND
6101QS	263125	3,500 LBS	15"	15.5"	24.25"	SIDE	SQUARE
6105GT	263135	5,000 LBS	15"	15.5"	21.25"	TOP	ROUND
6105QT	263130	5,000 LBS	15"	15.5"	21.25"	TOP	SQUARE

BULLDOG® Pipe Mount Swivel Jacks

For industrial and agricultural applications, the following BULLDOG® Pipe Mount Jacks come complete with the inner weld-on pipe swivel bracket that attaches to the trailer. Painted outer tube, zinc plated inner tube. Part numbers 195362 and 195312 have a square mount.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND
158451	282800	2,000 LBS	10"	11.25"	18.5"	TOP
158109	283000	2,000 LBS	10"	11.25"	17"	SIDE
158452	283200	2,000 LBS	15"	14.5"	27.75"	TOP
158151	283400	2,000 LBS	15"	14.5"	26.5"	SIDE
178101	284000	5,000 LBS	10"	11.25"	18.5"	TOP
178201	284200	5,000 LBS	10"	10"	17.5"	SIDE
178151	284400	5,000 LBS	15"	14.5"	27.75"	TOP
178203	284600	5,000 LBS	15"	15"	21.75"	SIDE
198100	285200	7,000 LBS	10"	10"	18.5"	TOP
198150	285400	7,000 LBS	10"	10"	17"	SIDE
198200	285600	7,000 LBS	15"	15"	20"	TOP
198250	285800	7,000 LBS	15"	15"	22"	SIDE

SQUARE TUBE JACK						
PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND
190706	285910	7,000 LBS*	15"	12.16"	22.41"	TOP
195356	283830	5,000 LBS**	15"	15.1"	22.1"	SIDE
195362	283835	5,000 LBS**	15"	15.1"	22.1"	SIDE
195306	283840	5,000 LBS**	15"	15.2"	22.2"	TOP
195312	283845	5,000 LBS**	15"	15.2"	22.2"	TOP

* 7,000 lb. static, 5,000 lb. lift
 ** 5,000 lb. static, 3,000 lb. lift



Wallace Forge Pipe Mount Swivel Jacks



Wallace Forge Pipe Mount Jacks offer the quality you expect from the name Wallace Forge. Every jack is backed by a 1 year warranty.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	MOUNT STYLE
WF378673	275125	2K	10"	10.75"	15"	TOP	PIPE
WF398373	275130	5K	15"	14.75"	25"	TOP	PIPE
WF378674	275135	2K	15"	14.75"	25"	TOP	PIPE
WF398423	275145	5K	10"	10.5"	17"	SIDE	PIPE

Snap Ring and Bolt-Thru Swivel Jacks



Snap Ring Jacks swing either direction to a position parallel with the tongue. The spring loaded single-lock pin secures the jack in an up or down position. The #87535 & #40000 have a wheel attached for easy movement of the trailer when not connected to the tow vehicle. The Swivel Mount Brackets that attach the 87535 to the trailer are sold separately on page F-19. The 40000, 40004 and 40005 come complete with mounting brackets.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	TYPE OF FOOT
87535	269600	500 LBS	10"	12.75"	22.25"	SIDE	WHEEL
40000	269450	1,000 LBS	10"	13"	20"	TOP	WHEEL
40004	270100	2,000 LBS	10"	10.5"	14"	TOP	SAND
40005	270300	2,000 LBS	15"	14.5"	19"	TOP	SAND



Fulton® Marine Jacks are zinc plated, equipped with a comfort grip handle, and have a reinforced poly wheel that is replaceable. All mounting hardware is included with either the bolt-on or weld-on version. Bolt-on models fit trailer tongues up to 3" x 5". Part #XP10 is a bolt-thru swivel, and the TJ series jacks are snap ring swivels. The 141304 features an all aluminum design w/3" wide caster wheel.



PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET TYPE	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	TYPE OF FOOT
TJ503	267280	800 LBS	10"	BOLT-ON	12.75"	23.25"	SIDE	WHEEL
TJ507	267282	800 LBS	10"	WELD-ON	12.75"	23.25"	SIDE	WHEEL
141304	267283	1,600 LBS	10"	BOLT-ON	13.75"	25.5"	SIDE	WHEEL
TJ1055	267285	1,000 LBS	10"	BOLT-ON	12.75"	23.25"	SIDE	WHEEL
XP10	267281	1,000 LBS	10"	BOLT-ON	12.75"	23.25"	SIDE	WHEEL



BULLDOG® Snap Ring Jacks come complete with a weld-on bracket. Each jack has a painted outer tube and zinc inner tube.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET TYPE	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	TYPE OF FOOT
151401	282400	2,000 LBS	10"	WELD-ON	11.25"	18.5"	TOP	SAND
151101	282600	2,000 LBS	10"	WELD-ON	11.25"	17.5"	SIDE	SAND
151421	282425	2,000 LBS	15"	WELD-ON	14.5"	27.75"	TOP	SAND
171401	283800	5,000 LBS	10"	WELD-ON	11.25"	18.5"	TOP	SAND
171412	283825	5,000 LBS	15"	WELD-ON	14.5"	27.75"	TOP	SAND



This Wallace Forge 2K Snap Ring Jack includes bracket, and has a painted outer tube with a zinc inner tube.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET TYPE	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	TYPE OF FOOT
WF373643	27515	2K	15"	WELD-ON	14.5"	24.5"	TOP	SAND

Snap Ring and Bolt-Thru Swivel Jacks, Continued...

Shelby's Swivel Jack is a Bolt-Thru design (called OSD) with the jack tube offset from the bolt to allow easier access for mounting. Also engineered with a 6° camber to keep the jack centered under the tongue. Zinc coated with "super-sealer" for added corrosion resistance. Fits 3" to 5" tongues. Includes mounting bracket. The new "Diamond Series" wheel provides added durability to the advanced engineering design of the OSD jack family.



PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET TYPE	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	TYPE OF FOOT
5854	263001	1,000 LBS	10"	BOLT-ON	14.5"	22.75"	SIDE	6" WHL
5856	263099	1,000 LBS	10"	WELD-ON	14.5"	22.75"	SIDE	6" WHL
5874A8	263020	1,500 LBS	10"	BOLT-ON	16.5"	24.75"	SIDE	8" WHL
5876A8	263034	1,500 LBS	10"	WELD-ON	16.5"	24.75"	SIDE	8" WHL



Boxed Swivel Jacks



These replacement jacks feature a zinc plated finish for corrosion resistance and easy bolt-on design. They are boxed for convenience and showroom display. Poly caster and mounting brackets included.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET TYPE	BRACKET HEIGHT	RETRACTED HEIGHT	TYPE OF WIND	TYPE OF FOOT
JP01-010	264210	850 LBS	9 3/8"	BOLT-ON	15 3/8"	23"	SIDE	WHEEL
EJ1000	264217	1,000 LBS	10"	BOLT ON	12.75"	23"	SIDE	WHEEL



JACKS,
COUPLERS
&
WINCHES

Fulton Kickstand Jack

Fulton Kickstand Jacks are quick and easy to use due to a lightweight, streamlined design, and snap ring swivel. Ideal for personal watercraft and snowmobile trailers. Zinc plated to resist corrosion.

PART NO.	REF. NO.	CAPACITY	BRACKET TYPE	GROUND CLEARANCE	TYPE OF FOOT
119244	282305	300 LBS	BOLT-ON	9"	WHEEL



Bulldog Rack Posts and Gearboxes

Bulldog's ever-popular Rack Jacks are available in many mounting and foot options. Choose the gearbox and rack post best suited for your particular need.

PART NO.	REF. NO.	DESCRIPTION	TYPE	CAPACITY
161	280800	GEAR BOX	WELD-ON "L"	750 LB
165	281200	GEAR BOX	A-FRAME	750 LB
167	281400	GEAR BOX	WELD-ON PIPE	750 LB
169	281600	GEAR BOX	BOLT-ON	750 LB
018006	281800	RACK POST	STEEL WHEEL	750 LB
018007	282000	RACK POST	POLY WHEEL	750 LB
018520	282200	RACK POST	SAND FOOT	750 LB



018006



169



Atwood A-Frame Power Jacks



Atwood's Power Jacks allow hassle-free trailer lifting with a 12v DC electric motor. Suitable for use on 2 5/16" A-Frame couplers. These jacks eliminate the need for hand cranking. Both feature a courtesy light and manual override handle.

PART NO.	REF. NO.	CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	RATE OF TRAVEL
80515	275100	2,500 LBS	14"	10 1/8"	24 7/8"	4" PER MIN.
80530	275102	3,500 LBS	14"	10 1/8"	24 7/8"	7" PER MIN.

Ultra-Fab Power Jack



The Ultra-Fab 3K, Electric, A-Frame Jack will mount in any A-Frame Coupler. The fast travel allows 10" of Lift in 30 seconds, saving time and effort. The durable powdercoat finish will keep your jack looking good. The UF3002 comes with a 1 year warranty on product defects only.

PART NO.	REF. NO.	DESCRIPTION
UF3002	269361	3K CAPACITY, 18" LIFT, A-FRAME ELECTRIC JACK

Magnum Lift Bolt-On Electric Motor



This bolt-on electric motor from Magnum Lift is a quick and easy upgrade, designed to convert the Binkley two-speed jack into a power jack, capable of lifting up to 6,500 lbs., at 7" per minute. In case of battery failure, the electric motor comes with a manual crank backup shaft (can be turned with a standard socket and ratchet, not included). Included is a mounting bracket, harnessed switch box with built-in circuit breaker and electrical connectors. The Magnum Lift is 9-1/2" wide, can mount on either side of the Binkley two-speed jack, and comes with a 3 year warranty.

PART NO.	REF. NO.	DESCRIPTION
LEGB-2	296691	ELECTRIC MOTOR GEARBOX FOR BINKLEY 2-SPEED JACKS

Bulldog Bolt-On Electric Motor

The Bulldog Bolt-On Electric Motor will bolt to any existing 1-Speed 12K Bulldog Jack. The 182420 features easy installation with 7,500 lbs. of lifting power. This motor comes with everything you need to convert a manual crank Bulldog jack to an easy to use Power Jack.

PART NO.	REF. NO.	DESCRIPTION
182420	296693	ELECTRIC MOTOR FOR BULLDOG 12K JACKS 7.5K LFT



Leveling Scissor Jack

This Leveling Scissor Jack works with most RV applications. Each jack has a lifting capacity of 7,500 lbs. Available as a pair with handle included on part #BAL-24SJ, rated at 15,000 lbs. per pair.

PART NO.	REF. NO.	CAPACITY	EXTENDED HEIGHT	RETRACTED HEIGHT
BAL-24SJ	275525	15,000 LBS	23 3/4"	4"
BAL-24011	275575	REPLACEMENT JACK FOR #BAL-24SJ		
BAL-24033	275625	REPLACEMENT CRANK HANDLE FOR #BAL-24SJ		



JACKS,
COUPLERS
& WINCHES

Atwood Stabilizer Jack

Designed as an easy-to-use practical means of leveling or stabilizing lightweight trailers of all types, this Jack is also used as a lightweight tongue stand. It can be bolted or welded to the inside or under-side of the trailer tongue or frame.

PART NO.	REF. NO.	CAPACITY	LIFT	RETRACTED HEIGHT
82300	275200	650 LBS	6"	11 1/2"
80480	275400	HANDLE ROD FOR #82300		



Wheel Chocks

These Wheel Chocks have a tiered step design that provides grip between the wheel and the chock. The ribbed design on the bottom of the chock helps prevent slipping. The 3/4" eyebolt on the end of the chock can be easily chained to keep chocks together or to reduce theft. The Rumber® wheel chock, #HDWC2 is rated to withstand a rolling load of 32,000 lbs., while #HDWC1 is not rated.

PART NO.	REF. NO.	SIZE
HDWC1	275649	10" X 8" X 6"
HDWC2	275645	8" X 8" X 5"

HDWC1



HDWC2

Big Foot Hydraulic Jack



This product gets its name from its large 10" by 10" foot pad that won't sink into soft ground. The jack is equipped with an adjustable mounting bracket and hardware to fit most gooseneck trailers. Comes complete with hydraulic cylinder and pump, hoses, switch control box, wiring harness and 120 amp breaker, along with the industry standard tube-in-tube jack design (4 1/2" outer tube for added strength). Requires automotive type 12v battery (not included).

The Big Foot comes with a 5 year warranty on the hydraulic cylinder, 2 years on all other parts, and 1 year on labor. The finish paint is gray and the product is boxed. A dual leg set is available as part number SQI24-C. A single leg Bigfoot with manual retract is also available as part number SQI24-1MR.



PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	LIFT
SQI24-I	296610	12,000 LBS	12,000 LBS	24"
SQI24-1MR	296612	12K JACK W/MANUAL RETRACT		
SQI24-C	296620	24K TANDEM SET		24"

Atwood Duraleg Jack



The Atwood Duraleg features 10K lbs. of lifting power and is easier to install than hydraulic jacks. The Duraleg features:

- Runs electric wires, not messy hydraulic lines.
- Works off 12v power source.
- Has a high efficiency motor and gear box
- Features sealed components, leaving the unit service free.



PART NO.	REF. NO.	DESCRIPTION
66369	275103	DURALEG 10K SINGLE BOXED W/ SINGLE CONTROL

Blaylock EZ Jack



The EZ Jack is an easy-to-use, safe and reliable device for changing tires on tandem axle trailers. Made of heavy-duty cast aluminum, it also functions as an excellent wheel chock.

PART NO.	REF. NO.	CAPACITY
EZ-JACK	275650	20,000 LBS

SAF-Holland Dropleg Jacks



The 48000 Series has been the industry standard for years. The DUALPIN Series offers greater Dropleg stability than single pin models. Its patented quick-release handle makes operation fast, simple and safer, keeping hands away from the load. Both Series of Dropleg Jacks come standard with a 4 3/8" square outer tubing, and prime paint finish. Also available with handle and handle clip. Both Series offer the "springloaded" self-retracting leg option.

The springloaded 48000 is available with a gray finish paint, specifically designed for use on aluminum trailers. Mounting brackets are welded onto the dropleg jack, so the jack can be bolted to the trailer rather than welded. This reduces assembly time and preserves the finish quality. The finish paint on both the handle and jack is baked-on at high temperature. The jack is boxed to protect the finish. 5 year warranty.



PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	DROPLEG LIFT	RETRACTED TRAVEL	SPG LOADED	HANDLE INCL.
48000	294000	12,000 LBS	12,000 LBS	13 1/2"	12"	26 1/8"	NO YES
48000SL	294020	12,000 LBS	12,000 LBS	13 1/2"	12"	26 1/8"	YES YES
DUALPIN	294030	20,000 LBS	12,500 LBS	12"	14"	26 1/8"	NO YES
DUALPIN-SL	294040	20,000 LBS	12,500 LBS	12"	14"	26 1/8"	YES YES
LG8700-31	294200	12,000 LBS	12,000 LBS	13 1/2"	12"	26 1/8"	NO NO
LG8700-31SL	294205	12,000 LBS	12,000 LBS	13 1/2"	12"	26 1/8"	YES NO
LGD700-21	294210	20,000 LBS	12,500 LBS	12"	14"	26 1/8"	NO NO
LGD700-21SL	294220	20,000 LBS	12,500 LBS	12"	14"	26 1/8"	YES NO

FINISH PAINT							
PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	DROPLEG LIFT	RETRACTED TRAVEL	SPG LOADED	HANDLE INCL.
48000SL-P	294022	12,000 LBS	12,000 LBS	13 1/2"	12"	26 1/8"	YES YES
LG8700-31SL-P	294207	12,000 LBS	12,000 LBS	13 1/2"	12"	26 1/8"	YES NO
LG0083-01-P	297602	PAINTED JACK HANDLE					

JACKS, COUPLERS & WINCHES

Shelby Dropleg Jacks

Shelby's line of Thoroughbred Square Tube Dropleg Jacks is manufactured with 12 gauge, 2.25" square steel tubing, that provides 70% more resistance to bending than comparable round tube jacks. They are also constructed with heavy duty ball bearings and copper infiltrated iron gears to reduce wear and extend the life of the jack. The cap on the top of the jack is removable, providing access to the gears for lubrication. Additionally, the handle has an oil-impregnated bushing for easy cranking and long life. Part 6100Z includes mounting hardware that fits 3" to 5" tongues. All Thoroughbred Series Jacks carry a lifetime limited mechanical warranty.



PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	DROPLEG LIFT	RETRACTED TRAVEL	TYPE OF WIND
6100Z	263105	2,500 LBS	2,500 LBS	15"	15"	SIDE
6101B	263110	3,500 LBS	3,500 LBS	15"	15"	SIDE
6108SW	263140	8,000 LBS	7,000 LBS	14.25"	14.5"	SIDE
6108TW	263144	8,000 LBS	7,000 LBS	14"	14.5"	TOP

BULLDOG® Dropleg Jacks



BULLDOG® Jacks offer a variety of capacities to meet your needs. The 180 and 190 series have a prime paint outer leg and zinc plated inner leg and drop tube. The 182 series jacks are primer paint throughout, and available with a self-returning springloaded dropleg. Part numbers ending in “H” include jack and handle. The 183 series are 2-speed models. The 183900 series jacks feature a traditional style 2-speed gearbox.

PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	LIFT	DROPLEG TRAVEL	RETRACTED HEIGHT	TYPE OF WIND	HANDLE INCL.	SPRING LOADED	PIN POSITION	OUTER TUBE
190704	285900	8,000 LBS	5,000 LBS	15"	13.5"	22.66"	TOP	YES	N/A	N/A	2.53"
190754	285950	8,000 LBS	5,000 LBS	15"	13.5"	25.06"	SIDE	YES	N/A	N/A	2.53"
190500	286000	8,000 LBS	7,000 LBS	15"	13.5"	20.75"	TOP	YES	N/A	N/A	2.53"
190510	286200	8,000 LBS	7,000 LBS	15"	13.5"	22.95"	SIDE	YES	N/A	N/A	2.53"
180354	286201	10,000 LBS	7,200 LBS	15"	13.5"	22.93"	TOP	YES	N/A	N/A	3.00"
180455	286209	10,000 LBS	7,200 LBS	15"	13.5"	25.67"	SIDE	YES	N/A	N/A	3.00"
182304	286220	12,000 LBS	10,000 LBS	12.5"	13.5"	22.5"	TOP	YES	NO	RIGHT	4.00"
182400	286225	12,000 LBS	10,000 LBS	12.5"	13.5"	27.5"	SIDE	NO	NO	RIGHT	4.00"
182400H	286250	12,000 LBS	10,000 LBS	12.5"	13.5"	27.5"	SIDE	YES	NO	RIGHT	4.00"
182417	286260	12,000 LBS	10,000 LBS	12.5"	13.5"	27.5"	SIDE	NO	NO	FRONT	4.00"
182417H	286265	12,000 LBS	10,000 LBS	12.5"	13.5"	27.5"	SIDE	YES	NO	FRONT	4.00"
182800	286275	12,000 LBS	10,000 LBS	12.5"	13.5"	27"	SIDE	NO	YES	RIGHT	4.00"
182800H	286300	12,000 LBS	10,000 LBS	12.5"	13.5"	27"	SIDE	YES	YES	RIGHT	4.00"
182817	286325	12,000 LBS	10,000 LBS	12.5"	13.5"	27"	SIDE	NO	YES	FRONT	4.00"
182817H	286330	12,000 LBS	10,000 LBS	12.5"	13.5"	27"	SIDE	YES	YES	FRONT	4.00"
183417	286335	12,000 LBS	10,000 LBS	12.5"	13.5"	27"	SIDE	NO	NO	FRONT	4.00"
183901	286339	12,000 LBS	10,000 LBS	12.5"	13.5"	28.5"	SIDE	NO	NO	FRONT	4.00"
183903	286343	12,000 LBS	10,000 LBS	12.5"	13.5"	28.5"	SIDE	NO	YES	FRONT	4.00"
183817	286345	12,000 LBS	10,000 LBS	12.5"	13.5"	27"	SIDE	NO	YES	FRONT	4.00"

JACKS,
COUPLERS
& WINCHES



183817



182800H



182417



182400



182304



183901



190500



190510



190754



180354




180455



183903

T.E.M. Dropleg Jack

A Dropleg Jack for heavier tongue trailers, the T.E.M. Dropleg Jack contain a 1 1/4" Acme screw with a 2" cast nut, 4" square outer tubing, and a primer painted finish.

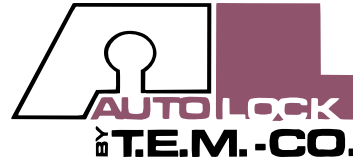

PART NO.	REF. NO.	DESCRIPTION
TC10B	295601	15K STATIC LOAD, 10K LIFT CAPACITY, 8" LIFT, 12" DROPLEG TRAVEL, 27" RETRACTED HEIGHT, TOPWIND, INCLUDES HANDLE, NON-SPRINGLOADED, RIGHT PIN POSITION

SAF-Holland Heavy Duty Jacks

LG4700-32NH



These Heavy Duty Jacks are made of 4 3/8" square outer tubing and are available with a single speed or two-speed gearbox. Combine two jacks to make a set of landing gear. Both the single speed and high gear on the two-speed gearbox operate at 4.5 turns per inch of travel. Low gear on the two-speed gearbox operates at 34.4 turns per inch of travel. The LG4700 jacks are non-spring loaded droplegs, while the LG4701 jacks are fixed leg. SAF-Holland heavy duty jacks are typically used on gooseneck trailers requiring very heavy weight bearing capacities. Finish is prime paint. 5 year warranty.

PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	LIFT	SPEED	DROPLEG TRAVEL	RETRACTED HEIGHT	HANDLE INCL.
LG4700-30	294320	50,000 LBS	25,000 LBS	13 1/2"	SET	12"	29 7/8"	YES
LG4700-31	294300	25,000 LBS	6,500 LBS	13 1/2"	SINGLE	12"	29 7/8"	YES
LG4700-31NH	294305	25,000 LBS	6,500 LBS	13 1/2"	SINGLE	12"	29 7/8"	NO
LG4700-32	294310	25,000 LBS	25,000 LBS	13 1/2"	TWO	12"	29 7/8"	YES
LG4700-32NH	294315	25,000 LBS	25,000 LBS	13 1/2"	TWO	12"	29 7/8"	NO



Engineering Your Road to Success



LG4700-32NH

PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	LIFT	SPEED	DROPLEG TRAVEL	RETRACTED HEIGHT	HANDLE INCL.
LG4701-71NH	294380	35,000 LBS	6,500 LBS	17"	SINGLE	N/A	34.25"	NO
LG4701-72NH	294370	35,000 LBS	35,000 LBS	17"	TWO	N/A	34.25"	NO
LG4701-71	294400	35,000 LBS	6,500 LBS	17"	SINGLE	N/A	34.25"	YES
LG4701-72	294600	35,000 LBS	35,000 LBS	17"	TWO	N/A	34.25"	YES

Section F-19

JACKS,
COUPLERS
& WINCHES

SAF-Holland Heavy Duty Landing Gear



The 51,000 Series Landing Gear is designed for strength and durability with strong ductile iron gears and 4 3/8" square outer tube. This SAF-Holland landing gear features a universal mounting bracket for inside or outside installation on semi-type trailers. High gear on the two-speed set operates at 4.5 turns per inch of travel, and low gear operates at 34.4 turns per inch of travel. LGC001-70 includes connecting pipe, strut brackets, crank handle, and clip. Finish is prime paint. 5 year warranty.



LGC001-70

51,000 SERIES LANDING GEAR SET							
PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	LIFT	SPEED	RETRACTED HEIGHT	HANDLE INCL.
LGC001-70	295315	140,000 LBS	50,000 LBS	17"	SET	34.25"	YES

REPLACEMENT JACKS FOR 51,000 SERIES LANDING GEAR							
PART NO.	REF. NO.	STATIC LOAD	LIFT CAP.	LIFT	SPEED	RETRACTED HEIGHT	HANDLE INCL.
LGC001-71	295305	70,000 LBS	50,000 LBS	17"	SINGLE	34.25"	NO
LGC001-72	295310	70,000 LBS	50,000 LBS	17"	TWO	34.25"	NO

Dropleg Jack & Landing Gear Accessories

These are industry standard accessories. All handles are primer coated. The clip, bushing, connecting pipe, and crosspipe are raw steel. These accessories can also be used with heavy duty jacks and landing gear.



PART NO.	REF. NO.	DESCRIPTION
LG0083-01	297600	6" HANDLE
LG0083-02	297615	6" HANDLE, YOKE TURNED 90°
LG0083-03	297625	12" HANDLE
LG0085	297630	HANGER CLIP
LG0094	297650	CONNECTING PIPE FOR TANDEM JACKS, 1" O.D. X 64 1/2" LONG
CP42	297640	CROSSPIPE EXTENSION FOR CENTER MTD JACKS, 42" OVERALL LENGTH
CPB42	297645	1 1/2" X 2" BUSHING FOR CP42 JACK CROSSPIPE

Atwood RV Landing Gear



Ideal for 5th wheel trailers, the R.V. Landing Gear is constructed of heavy-gauge steel with a zinc-plated extension tube and drop leg. For additional convenience, add the 75391 electrical motor kit (12v DC) for automatic operation. The motor also allows manual override.

Note: Use of the 75391 motor decreases the capacity rating of the 75333 landing gear to 5,000 lbs.

PART NO.	REF. NO.	CAPACITY	LIFT	DROPLEG TRAVEL	TOTAL ADJUSTMENT
75333	275105	6,000 LBS	20"	16"	36"
75391	275110	ELECTRIC MOTOR FOR 75333			

Atwood A-Frame Jack Support Plates and Flanges

These A-frame jack accessories are used to provide additional lateral support for A-frame jacks. Replacement Jack Flanges are available for repair or changing bracket mounting heights.

PART NO.	REF. NO.	DESCRIPTION
80263	274805	BOTTOM SUPPORT PLATE FOR 1K, 2.05" I.D. CENTER HOLE
83670	275000	BOTTOM SUPPORT PLATE FOR 2K & 5K, 2.28" I.D. CENTER HOLE
20969	274995	REPL. A-FRAME FLANGE FOR 2K & 5K, 2.21" I.D. CENTER HOLE
80004	274795	REPLACEMENT A-FRAME FLANGE FOR 1K, 2.05" I.D. CENTER HOLE



Jack Feet and Casters

A selection of Jack Feet and Casters fit A-Frame and tubular jacks. Atwood Feet and Casters feature "twist-lock" mounting for easy attachment and removal on Atwood jacks.

PART NO.	REF. NO.	DESCRIPTION	BRAND
5702	263102	2K ZINC JACK CASTER FOR 5718 A-FRAME JACK	SHELBY
5703	263103	5K ZINC JACK FOOT FOR 5718 A-FRAME JACK	SHELBY
JP02-050	264476	JACK FOOT, ZINC, 2K FOR A-FRAME JACKS	REDLINE
140070	267270	FOOT PLATE AND PIN FOR 5K A-FRAME JACKS	FULTON
80259	274020	2" X 6" POLY CASTER, FOR 1K JACKS W/ 1 3/4" TUBE	ATWOOD
40301	274040	6" CASTER 2" ID 7" HGT 1.2K LBS FOR 40201	ATWOOD
80552	274200	2" X 6" POLY CASTER, FOR 2K & 5K JACKS W/ 2" TUBE (CASTER RATED AT 1K CAP)	ATWOOD
82650	274400	JACK FOOT FOR 2K & 5K JACKS W/ 2" TUBE	ATWOOD
40303	274460	JACK FOOT W/PIN 5K LB RATING FOR 40201	ATWOOD
82660	274600	6 3/4" TALL JACK FOOT FOR 2K & 5K W/ 2" TUBE	ATWOOD
40302	274650	JACK FOOT 8.75" HIGH 2K LBS FOR 40201	ATWOOD
017125	287100	1 3/4" X 6" STEEL CASTER W/ LOCKPIN, FOR 2K & 5K JACKS W/ 2" TUBE (CASTER RATED AT 1K CAP)	BULLDOG
018173	287600	4" TALL JACK FOOT FOR 2K & 5K W/ 2" TUBE	BULLDOG



JACKS, COUPLERS & WINCHES



Swivel Jack Mounting Brackets

Choose the style to suit your need and jack type, whether a snap ring or pipe mount. Most parts are brand specific.

PART NO.	REF. NO.	DESCRIPTION	BRAND
87501	270900	WELD-ON BRACKET & SNAP RING FOR 1K	ATWOOD
87502	270910	BOLT-ON BRACKET & SNAP RING FOR 1K	ATWOOD
81271	271800	WELD-ON PIPE SWIVEL BRACKET FOR 2K, 5/8" PIN HOLE DIAMETER	ATWOOD
82500	272000	WELD-ON PIPE SWIVEL BRACKET FOR 5K, 7/8" PIN HOLE DIAMETER	ATWOOD
005006	286400	WELD-ON PIPE SWIVEL BRACKET FOR 5K, 5/8" PIN HOLE DIAMETER	BULLDOG
005024	286600	WELD-ON PIPE SWIVEL BRACKET FOR 7K, 5/8" PIN HOLE DIAMETER	BULLDOG
015904	286800	REPL. RING ONLY, FOR MOST SNAP RING SWIVEL JACKS	ALL
015909	287000	WELD-ON BRACKET ONLY, USE W/ 015904 SNAP RING	BULLDOG



Redline Jack Repair Parts



Redline Jack Repair Kits include the parts needed to perform the most common jack repairs. Packaged for pegboard display.



JP02-010



JP02-020



JP02-030



JP02-050

PART NO.	REF. NO.	DESCRIPTION
JP02-010	264350	TOPWIND HANDLE, FITS ATWOOD, SHELBY & FULTON JACKS
JP02-020	264355	TOPWIND HANDLE, FITS BULLDOG 2-5K JACKS
JP02-030	264360	TOPWIND HANDLE, FITS FULTON & BULLDOG 7K DROPLEG JACKS
JP02-050	264476	JACK FOOT, ZINC, 2K FOR A-FRAME JACKS
JP02-100	264400	9/16" PIN & CHAIN FOR BULLDOG PIPE MNT JACKS
JP02-110	264410	5/8" PIN & CHAIN FOR BULLDOG 7K SWIVEL JACKS
JP02-150	264475	1/2" PLUNGER PIN ASSEMBLY FOR BULLDOG SWIVEL JACKS
JP02-200	264480	SNAP RING, FITS MOST SWVL JACKS

SAF-Holland Jack Repair Parts



JACKS, COUPLERS & WINCHES



LG0266



PP0013-70



LG1494-01

PART NO.	REF. NO.	DESCRIPTION
LG1462	298000	CROSS SHAFT BUSHING FOR DROP LEG JACK 48000
LG0310-06	298800	FOOT FOR DROPLEG JACK 48000
LG1494-01	299400	UPPER MITER GEAR FOR DROPLEG JACK 48000
LG1495-01	299600	LOWER MITER GEAR W/ HUB FOR DROPLEG JACK 48000
PP0013-70	299800	THRUST BEARING FOR DROPLEG JACK 48000
LG0880	300430	TOP CAP FOR DROPLEG JACK 48000 (NEW STYLE)
LG0266	300610	STRUT BRACKET FOR LANDING GEAR

BULLDOG® Jack / Coupler Repair Parts



015500



025201



024192

PART NO.	REF. NO.	DESCRIPTION
701472	286450	REPL PIN FOR 190500 & 190510 DROP LEG JACKS
015500	288220	CAP FOR SIDEWIND JACKS
024190	288400	RELEASE HANDLE FOR 2B & 4B COUPLERS
024192	288600	COLLAR CLIP FOR 2B & 4B COUPLERS
025201	289000	SNAPPER PIN & CHAIN FOR PIN RELEASE COUPLERS
025230	289200	COUPLER RELEASE PIN FOR 024190 HANDLE

Shelby Winches

Shelby Winches are engineered for strength and durability. Every winch meets or exceeds SAE standard J1853. Bushings are oil impregnated for smooth operation and long life. Frames are embossed for added strength. Gears, pawls, and ratchets are heat treated. All winch reels have bolt holes for use with winch straps. Metal parts are zinc plated with “supersealer” to give a long-lasting finish that is resistant to corrosion. The finishing touch is a dimpled handle that provides a comfortable grip for the user.



POSI-LOCK SINGLE SPEED WINCH				
PART NO.	REF. NO.	CAPACITY	GEAR RATIO	RATCHET STYLE
5400	408800	400 LBS	RATCHET	1-WAY
5402	408810	600 LBS	3.1:1	1-WAY
5403	409010	900 LBS	3.1:1	1-WAY
5404	409410	1,200 LBS	4.1:1	1-WAY
5405	409420	1,400 LBS	4.1:1	2-WAY
5407	409610	1,700 LBS	5.1:1	2-WAY
5408	409810	1,900 LBS	5.1:1	2-WAY
5409	409815	2,100 LBS	5.1:1	2-WAY
0937	412420	REPL HANDLE FOR 5403, 5404, 5405, 7" LONG		
0854	412430	REPL HANDLE FOR 5409, 10" LONG		

Unique Features Include:

- cold-forged steel pinion gear (400 lb to 1,400 lb winch)
- stacked steel pinion gear (1,700 lb to 2,100 lb winch)
- one-way ratchet free spools in “off” position
- two-way ratchet free spools in “center” position



POSI-LOCK TWO SPEED WINCH				
PART NO.	REF. NO.	CAPACITY	GEAR RATIO	RATCHET STYLE
5460	409835	2,300 LBS	4.2:1 / 11.8:1	2-WAY
5470	410100	2,800 LBS	5.1:1 / 14.7:1	2-WAY
5480	410150	3,200 LBS	5.1:1 / 14.7:1	2-WAY
5481	410175	3,200 LBS	5.1:1 / 14.7:1	2-WAY W/HAND BRAKE
2400	412450	REPL HANDLE FOR 5460, 5470, 5480, 10" LONG		

Unique Features Include:

- winch reel has cable keeper
- stacked steel pinion gear for added strength
- handle will not spin in free-spool “center” position
- change gears without removing handle (press lock lever and then shift gears)



POSI-LOCK BRAKE WINCH				
PART NO.	REF. NO.	CAPACITY	GEAR RATIO	RATCHET STYLE
5351	410500	1,000 LBS	4.1:1	AUTOMATIC BRAKE
5352	410700	1,500 LBS	5.1:1	AUTOMATIC BRAKE
5353	410900	2,500 LBS	15.8:1	AUTOMATIC BRAKE

Unique Features Include:

- winch reel has cable keeper
- stacked steel pinion gear for added strength
- dual friction brake pad to stop motion when handle is released
- covered brake mechanism to protect against oil, dirt, and the elements



JACKS,
COUPLERS
&
WINCHES

Fulton Single Speed Winches



Fulton® Single Speed Winches are designed to meet your toughest pulling demands. They feature efficient gear ratios, full-length drum bearings, oil impregnated shaft bushings and patented “Comfort Grip” handle for ease of cranking. All gears are high carbon steel for superb strength and long term durability. Stamped carbon steel frames provide rigidity for gear alignment and longer cycle life. Zinc finishes provide excellent corrosion resistance in all environments. All models are designed for use with rope or strap.

PART NO.	REF. NO.	CAPACITY	GEAR RATIO	RATCHET STYLE
T1300	409415	1,300 LBS	4.1:1	1-WAY
T1801	409710	1,800 LBS	5.1:1	2-WAY

T1300



Winch Straps

Our Winch Straps are made of polyester webbing with a forged slip hook on one end. The looped end of the 5604 is ideal for personal watercraft use.


PART NO.	REF. NO.	DIMENSIONS	CAPACITY
6030	412600	2" X 20 FT	3,500 LBS
5604	412550	2" X 15 FT	3,500 LBS



Ramsey Electric Winches



REP Series

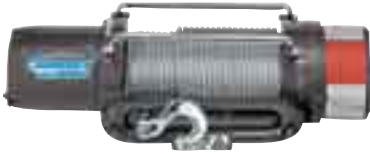

The REP Series from Ramsey Winch is ideal for heavy weight applications where strong line pull rating is required, along with fast line speed. This winch is equipped with a three-stage planetary gear system, automatic load-holding brake, cam action clutch that disengages the planetary gear system for free spooling, and hawse fairlead. The REP8000H has a 3.8 horsepower 12v DC series wound motor.




Limited Lifetime Warranty

PART NO.	REF. NO.	DESCRIPTION	LINE SPEED**	AMP DRAW*	MAX RATED LINE PULL*	CABLE LENGTH	TYPE OF CONTROL
REP8000H	412735	ELECTRIC WINCH	36FPM / 5FPM	87 / 405	8K TO 4.8K	95 FT	12FT CABLED PENDANT

- * First figure is with no load; second figure is at max. rated line pull (measured at the first layer of cable)
- ** Variable due to number of layers of cable on drum
FPM = feet per minute

TR Series

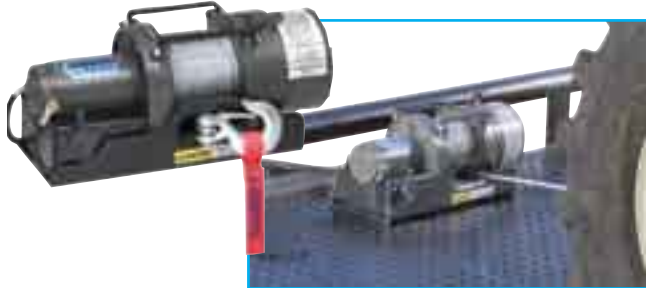

Ramsey's new TR5000 winch is specifically designed for the trailer market; with its proven 3-stage planetary gear system designed for fast line speed, its automatic load-holding brake, and cable tensioner system. A convenient mounting platform with hawse fairlead, weather resistant solenoid assembly, and 12 ft. wire pendant remote round out this package. The TR5000 has a 1.3 horsepower 12v DC permanent magnet motor.

Limited Lifetime Warranty


PART NO.	REF. NO.	DESCRIPTION	LINE SPEED**	AMP DRAW*	MAX RATED LINE PULL*	CABLE LENGTH	TYPE OF CONTROL
TR5000	412738	ELECTRIC WINCH	15FPM / 5FPM	45 / 230	5K TO 3.2K	50 FT	12FT CABLED PENDANT

- * First figure is with no load; second figure is at max. rated line pull (measured at the first layer of cable)
- ** Variable due to number of layers of cable on drum
FPM = feet per minute

Badger Series



The Ramsey Badger Series provides excellent pulling power in a small package. The Badger has a 12v DC permanent magnet motor that uses minimal AMP draw, while providing 0.9 horsepower to drive the three-stage planetary gear system. Other features include a free-spool clutch and automatic load-holding brake not previously available on a Ramsey 2500 lb. winch. The Badger is also equipped with 50 feet of spooled wire rope that is anchored to the winch drum. Additionally, each winch includes a roller fairlead. To attach the fairlead to the winch, the mounting plate (RB2500-MP) must be used.

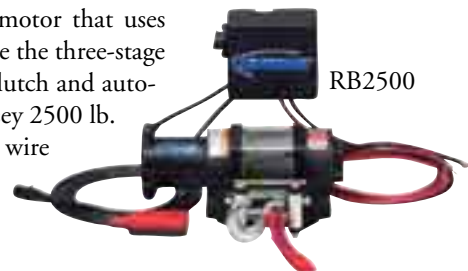

Limited Lifetime Warranty

PART NO.	REF. NO.	DESCRIPTION	LINE SPEED**	AMP DRAW*	MAX RATED LINE PULL*	CABLE LENGTH	TYPE OF CONTROL
RB2500	412727	ELECTRIC WINCH	18FPM / 7.5FPM	36 / 140	2.5K TO 1.4K	50 FT	12FT CABLED PENDANT
RB2500-MP	412725	MOUNTING PLATE FOR RAMSEY BADGER ELECTRIC WINCH					

- * First figure is with no load; second figure is at max. rated line pull (measured at the first layer of cable)
- ** Variable due to number of layers of cable on drum
FPM = feet per minute